

T ECHNICAL INFORMATION



New Tool


Models No. ▶ 5606B

Description ▶ 160 mm (6-1/4") Circular Saw

CONCEPTION AND MAIN APPLICATIONS

Model 5606B is the improved version of the existing Model 5600NB and Its brief benefits are;

- *Extremely quiet
- *Smoother operation by adopting carbide-tipped saw blade and powerful motor.

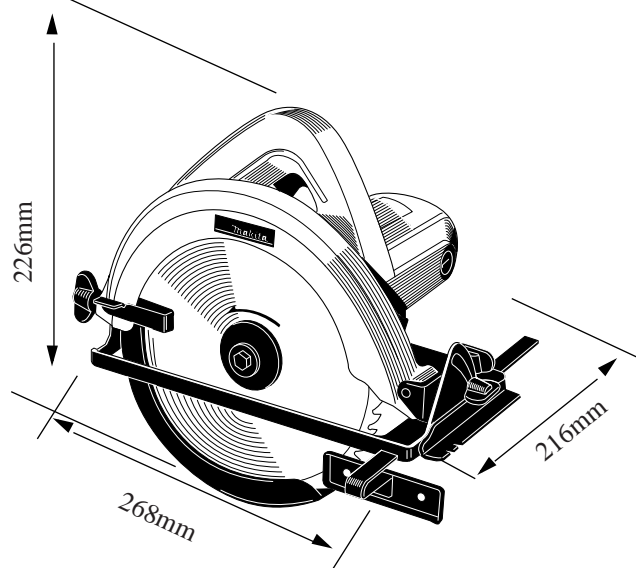

► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	10.0	50/60	950	530	850
115	8.5	50/60	950	530	850
220	4.5	50/60	950	530	850
230	4.3	50/60	950	530	850
240	4.2	50/60	950	530	850

Blade diameter	160 mm (6-1/4")	
Arbor diameter	20 mm (25/32")	
Max. cutting capacities	At 90°	55 mm (2-11/64")
	At 45°	36 mm(1-27/64")
No load speed	4,700 R/min.	
Net weight	3.1 kg	

► Standard equipment

- Carbide-tipped saw blade 160(40teeth),
- Guide rule, Hex wrench 5, Wrench Holder 5.6

► Optional accessories


Grip

► Features and benefits

1. Double insulated
2. See the attached sheet for more information.

The standard equipment for the tools shown may differ form country to country

Extremely quiet
 Quietness is performed by new shape of rear vent of motor housing.

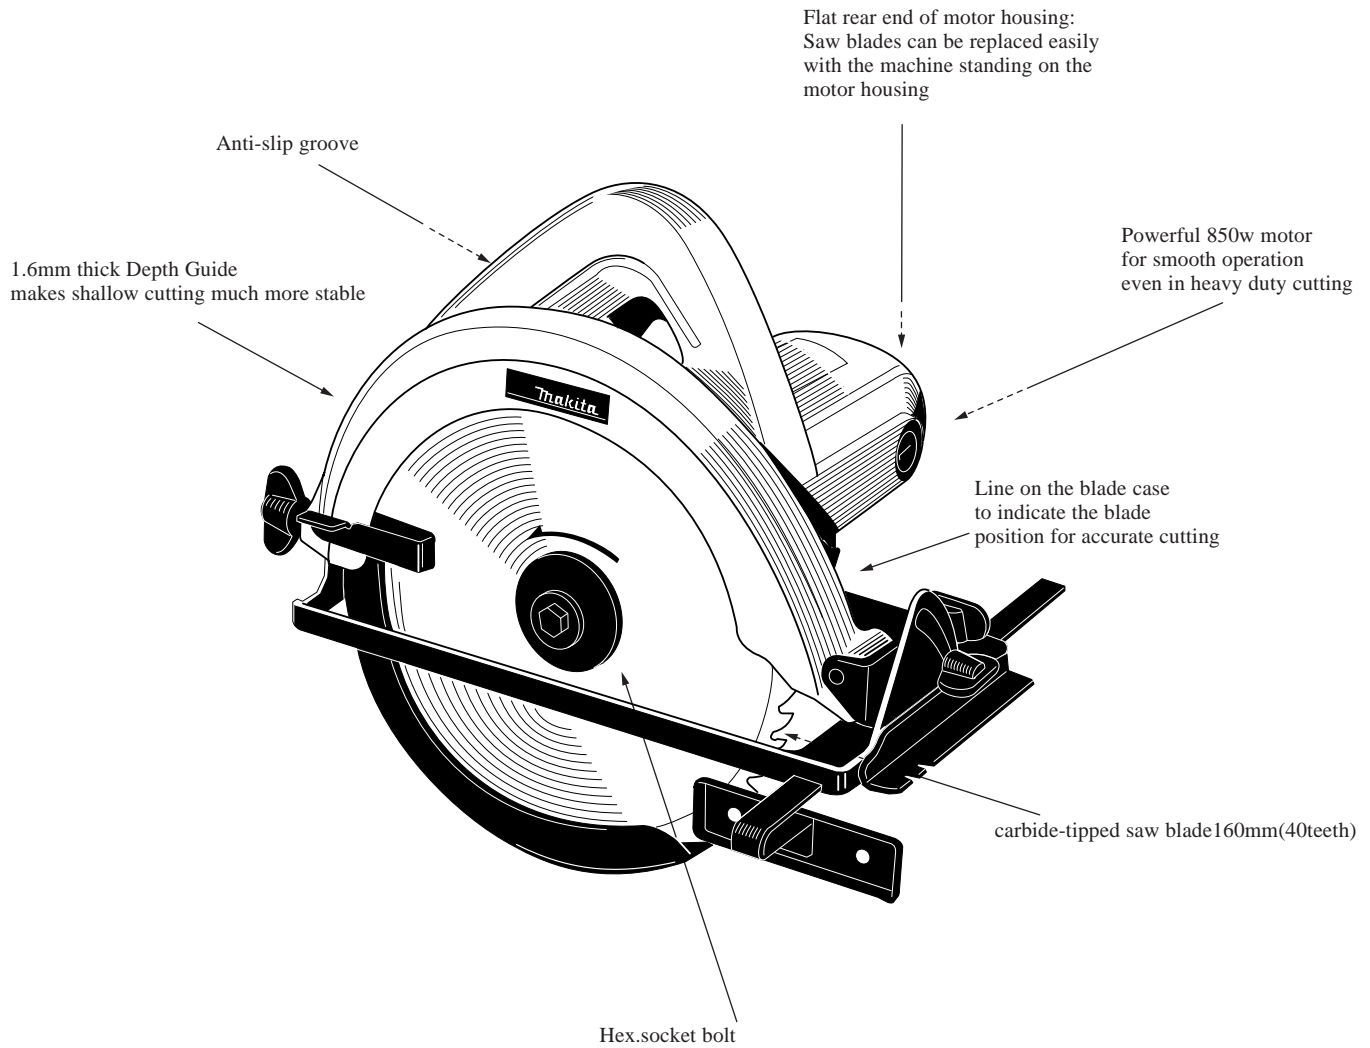

Comparison

Model		MAKITA	
		5606B	5600NB
Voltage (V)		220	220
Current (A)		4.5	3.9
Input		950	800
Max. Output(W)		850	650
No load speed		4,700 R/min.	4,000 R/min.
Arbor diameter			
Blade diameter		160 mm (6-1/4")	
Max. cutting capacities	At 90°	55 mm (2-11/64")	
	At 45°	36 mm(1-27/64")	
Net weight		3.1 kg	
Cycle (Hz)			