

For Models ▶ 5057KB


Description ▶ 185mm(7-1/4") Dustless Circular

CONCEPTION AND MAIN APPLICATIONS

Model 5057KB is 185mm(7-1/4") Dustless Circular Saw that have been developed for cutting of siding board without splashing the dust from work piece.

The features are :

- 1.Strong motor to cut siding board in five layers.
- 2.Safety cover can be opened with lever for plunge cut.
- 3.Easy to see the ink line
- 4.With long life tipped saw blade for siding board.

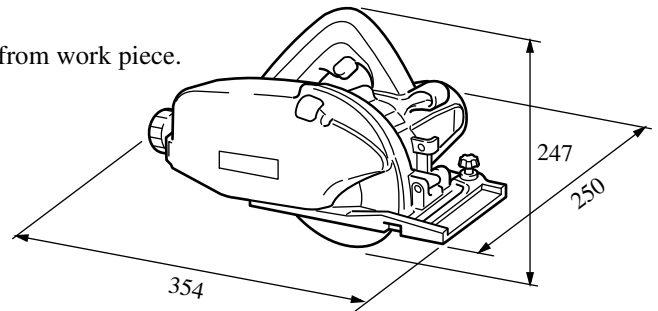

► Specifications


Voltage (V)	Current(A)	Cycle(Hz)	Continuous Rating		Max. output(W)
			Input (W)	Output (W)	
120	13	50/60	1400	750	1900
240	6.5	50/60	1400	750	1900
No load speed (rpm)		5800			
Saw blade diameter		Outer diameter... Ø185mm(4") Inner diameter ... Ø15.88mm(5/8")			
Max. cutting depth		At angle 0° degree ...60mm (2-3/8") At angle 45° degrees ... 30mm (1-1/8")			
Power supply cord		5m			

► Standard equipment

- Guide Rule
- Wrench 13
- Tipped saw blade 185mm (28 teeth)

► Optional accesories

- Diamond tipped saw blade 185mm
- Diamond wheel

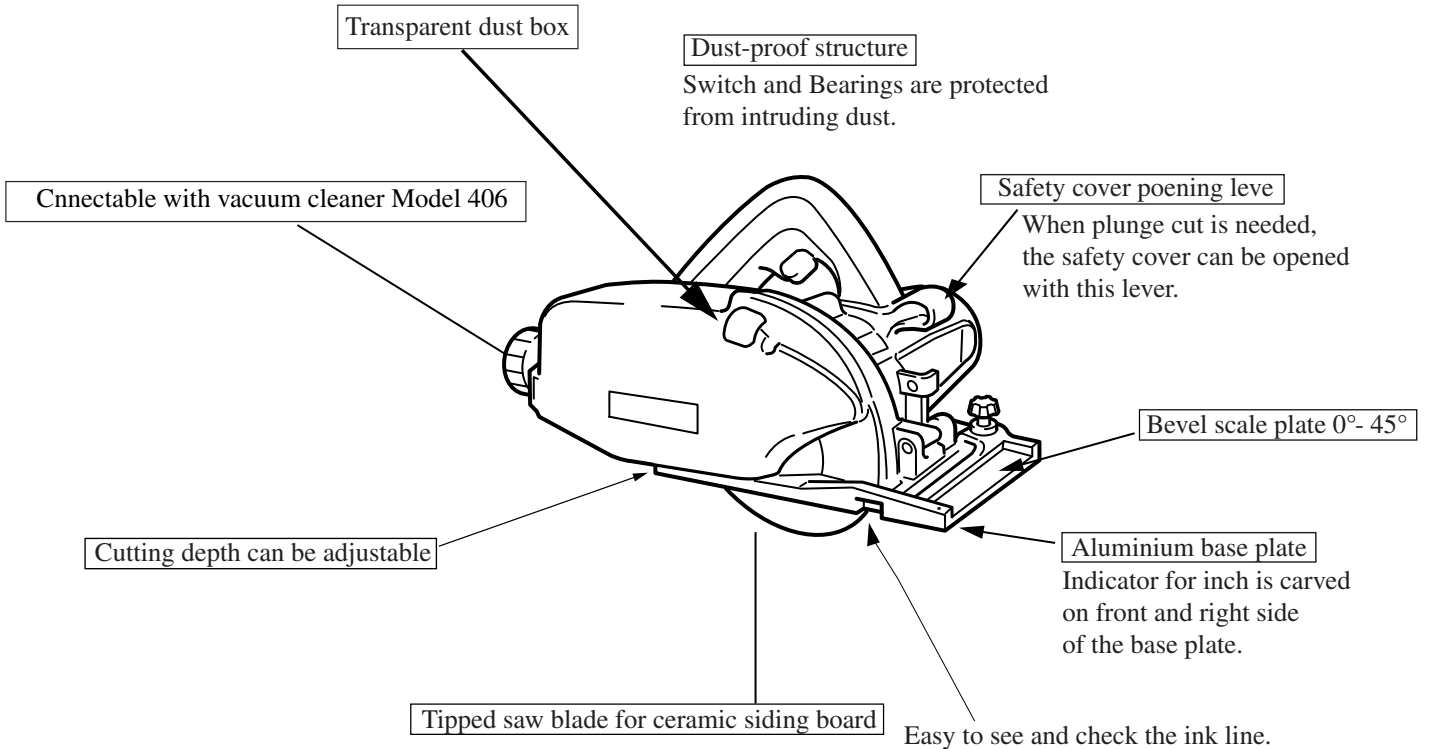


Repairing facility

Angular guide, depth guide and depth hinge sections are mouted with screws in stead of with welding etc. So, these parts can be dismantled at repairing.

► Repair

Rip section on the oil seal has to be greased illustrated as below.

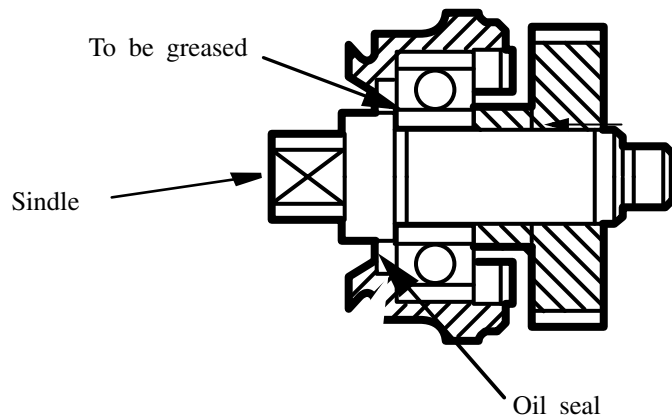

As for Mounting and dismounting, please refer to Model 5007NB.

► Interchangeability

The following spare parts are interchangeable with the ones for Model 5007NB.

Motor Housing (Interchangeable with the motor housing which does not have a hole for rubber pin by the hole for ball bearing.)

Armature, Field, Switch, Handle Cover, Helical Gear 39, Inner Flange, Outer Flange
Hex Flange Head Bolt, Needle Bearing, Ring 15, Woodruff Key 5, Retaining Ring R-35 for Hole,
Retaining Ring S-15 and S-42 for shaft, Lever Plate, Lock Plate, Fan Guide,